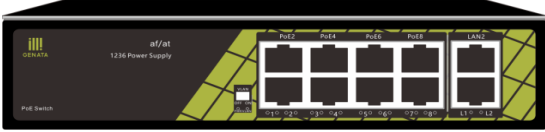


product specification

Model: GNT-P9828V3

key feature

1. Using CAT.5 network cable support to power to the access point and IP camera;
2. Networking standard : IEEE 802.3af, IEEE 802.3at;
3. Long distance transmission and power supply, maximum transmission distance is 200m;
4. DIP can be switch (VLAN isolation/non-isolation) (port of 7. 8. 10M/100m)
5. Upload port automatic flip (Auto MDI/MDIX)
6. Network performance: Store - and - forward
7. intelligent power distribution and secure power supply system
8. Power circuit protection function can protect equipment;
9. Zero configuration feature power supply is automatically supplied to the adaptive equipment
10. 6KV professional thunder design, overtemperature protection, short circuit protection, high reliability, high stability
11. Nature cooling, small, compact, mute, all the designs are convenient for you to put
12. Support: port no-load saving power.

Picture	
product specification	P9828V3
18	PoE(1 - 8) up-Link(1 - 2)
Transmission Rate	100Mbps full Duplex ; 10 or 100Mbps Half Duplex Network Interface: 10BASE-T or 10BASE-TX 100BASE-TX RJ45 port of Ethernet
Performance & Specification	Bandwidth : 2.0 Gbps Network Latency (10 to 100Mbps):≤ 20μs (use the 64 byte package size) MAC address table: 1K The Frame Filter & Transmission Rate: 14800pps the most for 10M port, 148800pps the most for 100M port
Networking Standard	IEEE 802.3i 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3x FlowControl IEEE 802.3af/at Power over Ethernet
PoE Core of Power Cable	Default: 1/2(+), 3/6(-); { Can be select 4/5(+), 7/8(-) }
LEDs Light	PWR Light no extinguish
Power Support	ower input: AC 180~240V 120W Power Output: PoE 1-8port1/2(+52V), 3/6(GND)
Physical Specifications	Size (L*W*H) 187mm*139mm*43mm
Working Environment	Operating Temperature: -10℃~40℃ (-14°~104°F) Storage Temperature: -40℃~70℃ (-104°~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing
Electromagnetic Compatibility	CEmark FCCPart15 , Class B VCCI Class BEN 55022 (CISPR 22) C-Tick
Warranty	Whole machine: 1 year
Package Content	AC Power Cable , Installation Manual , Warranty Card